




**VibraTester**

## VIBRATOR QUALITY CONTROL SYSTEM

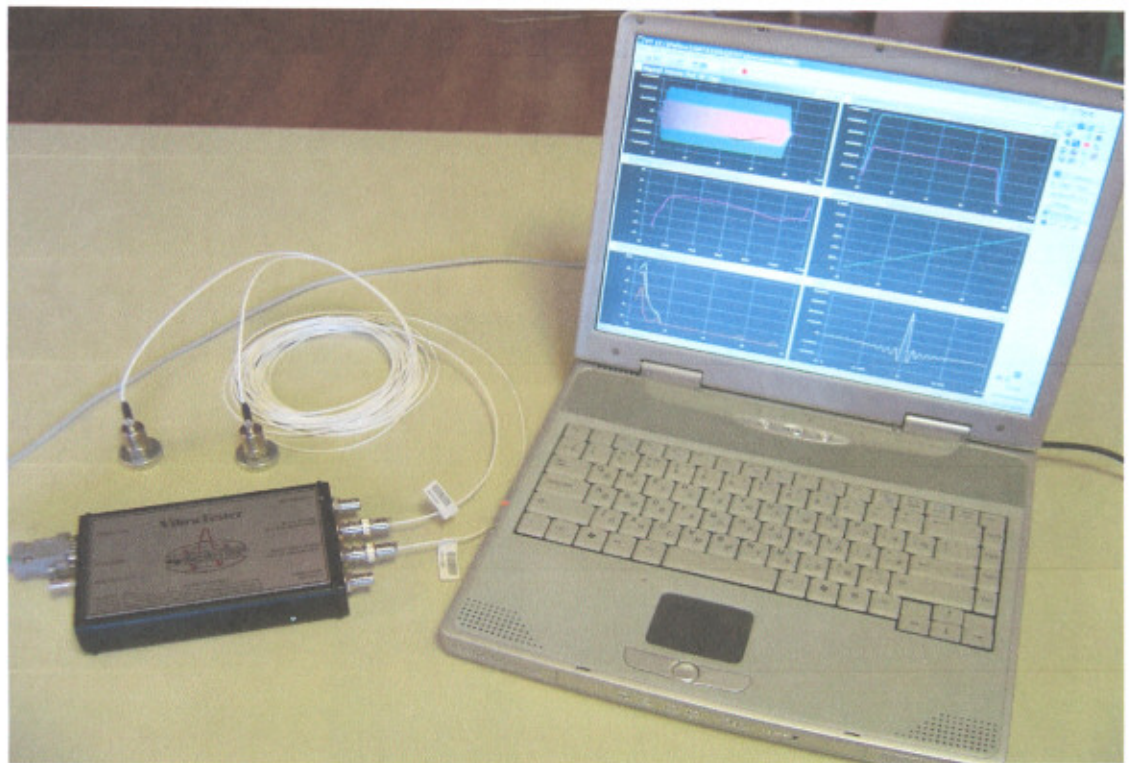

- \* **EASY AND QUICK CRITICAL VIBRATOR DETECTION**
- \* **AUTO- AND CROSS CORRELATION OF ANY SIGNAL RECORDED**
- \* **TESTS ACCELEROMETER SENSITIVITY**
- \* **SEPARATE ACCELEROMETERS FOR INDEPENDENT MONITORING**
- \* **SELECTABLE SAMPLE RATE AND SELF-TESTING CAPABILITY**

### Basic Specifications

- |   |           |                                   |                |
|---|-----------|-----------------------------------|----------------|
| * Max. Input Signal, V:                 |           | * Accelerometer Sensitivity, mV/g | 2 – 50         |
| - REF and VibOut Channels               | $\pm 10$  | * Power Supply, V                 | 9 - 36         |
| - BP and RM Channel                     | $\pm 2$   | * Current Consumption, mA         | 250 @ 12 V     |
| * Registered Signal Frequency Range, Hz | 3 - 450   | * Dimensions, mm                  | 200 x 110 x 40 |
| * Channel Phase Non-Similarity, deg.    | $\pm 0.1$ | * Weight, kg                      | 0,45           |
| * Channel Amplitude Non-Similarity, %   | $\pm 0.1$ |                                   |                |
| * Sampling Rate, kHz                    | 1         |                                   |                |

**GEOVIP:** 4, ul. N. Krasnoselskaya, Moscow, 107140, Russia

Phone: / Fax: +7-499-264-6787 E-Mail: info@geosvip.ru